

FLOOD LIGHT

Eco Power FHPFL



- 50-200W
- Integrated die casting housing
- 30° / 60° / 90° / 140°
- System IP66 & Philips Driver
- Black / Silver Gray options

LUXEON[®]

BY PHILIPS LUMILEDS

Quality
you can trust.




Xitanium LED Driver


Product by FH Solar & Led Ibérica

México / Colombia / Ecuador / Spain
www.fhsolarled.com


Eco Power

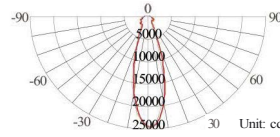


AVERAGE BEAM ANGLE(50%):30 DEG

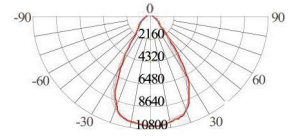

AVERAGE BEAM ANGLE(50%):60 DEG

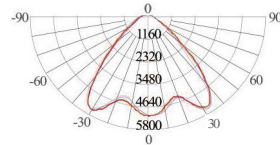



AVERAGE BEAM ANGLE(50%):90 DEG

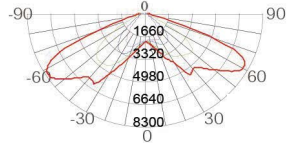

AVERAGE BEAM ANGLE(50%):
ASYMMETRIC 80*140 DEG

Flood Light

MODEL	FHPFL50A	FHPFL100A	FHPFL150A	FHPFL200A
SYSTEM POWER(W)	50	100	150	200
SYSTEM FLUX(LM)	6000	12000	18000	24000
NET WEIGHT(KG)	2.3	4.1	4.6	5.5

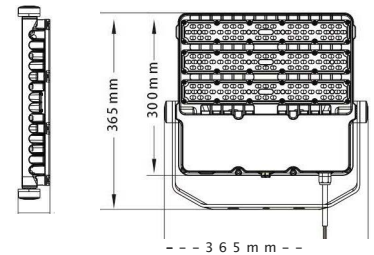

Specification

CHIP	DRIVER	LED EFFICIENCY	SYSTEM EFFICIENCY
Lumileds 5050/ 3030	Philips	150 - 180LM/W	120-148LM/W
AC INPUT	COLOR RENDERING	COLOR TEMPERATURE	POWER FACTOR
220-240V	RA 70 RA 80 RA 90	3000K-5700K	>>0.95
IP CLASS	INSULATION CLASS	WORKING TEMPERATURE	THD
IP66	CLASS1	-40°C-50°C	<<15%
HOUSING MATERIAL	LUMINOUS MAINTENANCE	WORKING LIFE(LS)	DIMMING
Die Casting	L80	50000HRS	1-10V/DALI



Product by FH Solar & Led Ibérica

México / Colombia / Ecuador / Spain
www.fhsolarled.com

